

Your Local source for Tools & Supplies since 1945

AIS

INDUSTRIAL & CONSTRUCTION SUPPLY



3900 Ulster Street
Denver, Colorado 80207

Call 303-355-2391 or
email sales@aisind.com
for pricing and availability

www.aisind.com

'Fathers Day Promo'

All Torque Product Orders of \$1,000 or more
in June will receive this 150 Pc Tool Set




Item no. CTK150

**While
Supplies
Last!**

Micrometer Torque Wrenches


- Accurate in clockwise direction +/-3% from 20% to 100% full scale
- Meets or exceeds ASME B107.300
- Non-slip metal knurled handle provides secure gripping power

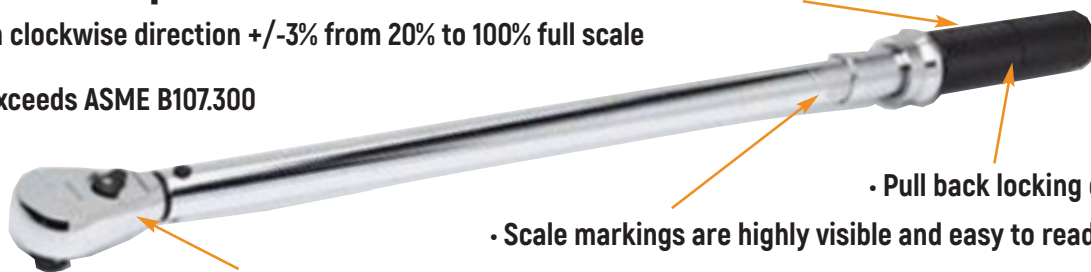

• Thin profile, sealed tear-drop head design for access and durability

• Pull back locking collar

• Scale markings are highly visible and easy to read

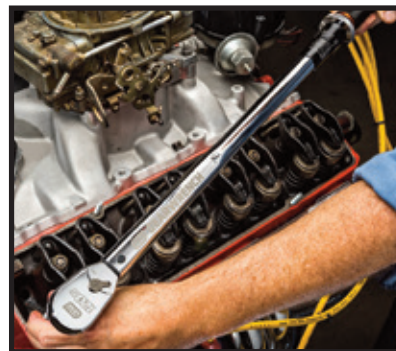

Item No.	Description
85061	3/8" Drive Micrometer Torque Wrench 30-250 in./lbs.
85062	3/8" Drive Micrometer Torque Wrench 10-100 ft./lbs.
85063	1/2" Drive Micrometer Torque Wrench 20-150 ft./lbs.
85065	3/4" Drive Micrometer Torque Wrench 100-600 ft./lbs.
85066	1" Drive Micrometer Torque Wrench 30-250 ft./lbs.

1" Drive Micrometer Torque Wrenches

- 24-tooth teardrop shaped head with on/off switch allow even more access in tight spaces
- Torque accuracy of +/- 3% CW in the upper 80% of wrench capability delivers high performance



Item No.	Description
85068	1" Drive Micrometer Torque Wrench 200-1000 ft./lbs.



**Call Us For Great
Pricing On
GEARWRENCH!**

Electronic Flex & Standard Head Torque Wrenches with Angle

Maximum Access and Accuracy

- "Target Torque Alert" and "Target Angle Alert" gives a warning as the target torque or target angle is approached, so there is less change of over torquing a bolt
- Angle Accuracy [+/- 1% of Reading] + [+/-1 degree @ angular
- Meets or exceeds ASME B107.300



Item No.	Drive Size	Head Style	Primary Scale Range	Primary Scale Max Torque	Primary Scale Increments	Secondary Scale Max Torque	Secondary Scale Increments	Tooth Count	Head Thickness	Overall Length
85076	3/8"	Standard	10-100 ft./lb.	0.1 ft./lb.	10-135 Nm	0.1 Nm	72	0.7 in.	15.8 in.	
85079	1/2"	Flex	25-250 ft./lb.	0.1 ft./lb.	34-340 Nm	0.1 Nm	72	0.9 in.	25.0 in.	
85194	1/4"	Flex	2.0-20 ft./lb.	0.1 ft./lb.	2.7-27.0 Nm	0.1 Nm	120	0.4 in.	15.5 in.	
85195	3/8"	Flex	10-100 ft./lb.	0.1 ft./lb.	13.5-135 Nm	0.1 Nm	120	0.55 in.	15.9 in.	
85196	1/2"	Flex	25-250 ft./lb.	0.1 ft./lb.	34-340 Nm	0.1 Nm	120	0.74 in.	24.3 in.	

Torque Multipliers

Item No.	Description
64-830G	1/2" Drive Input - 3/4" Drive Output 750 ft./lb.
64-832G	1/2" Drive Input - 3/4" Drive Output 1,200 ft./lb.
64-833G	3/4" Drive Input - 1" Drive Output 2,000 ft./lb.



120XP Micrometer Torque Wrenches

Dual Scales, Metric and SAE

High definition scale markings are easier to read

Knurled aluminum grip, midpoint marked for accuracy



Double-stacked pawls engage a 60-tooth gear providing exceptional strength, exceeding ASME specifications

Pull back locking collar

Injection molded cases with removable lites for convenient storage

Item No.	Drive Size	Head Style	Primary Scale Range	Primary Scale Increments	Alternate Scale Range	Alternate Scale Increments	Tooth Count	Head Thickness	Overall Length
85174	3/8"	Standard	30-250 in./lbs.	1 in./lb.	4-23 Nm	0.1 Nm	60T/120 pos.	06 in.	18.3 in.
85176	3/8"	Standard	10-100 ft./lbs.	1 ft./lb.	20-142 Nm	1.4 Nm	60T/120 pos.	0.55 in.	18.4 in.
85180	1/2"	Standard	20-150 ft./lbs.	1 ft./lb.	27-203 Nm	1.4 Nm	60T/120 pos.	08 in.	24.9 in.
85181	1/2"	Standard	30-250 ft./lbs.	2 ft./lb.	54-353 Nm	2.7 Nm	60T/120 pos.	0.75 in.	24.9 in.



Torque Screwdrivers & Set

Bench Top Torque Tester



89620



Item No.	Description
89620	20 Piece Torque Screwdriver Set 10-50 in./lbs.
89623	Torque Screwdriver 5 - 25 in-lbs.
89624	Torque Screwdriver 10 - 50 in-lbs.

Item No.	Description
89633	10 - 100 ft-lbs